


BPF 4/4

Band-Pass Filter for the 80 MHz Band

DESCRIPTION

- The BPF 4/4 is a 4-helical resonator band-pass filter with aperture-coupling between the resonators.
- This filter can be used as a preselector to protect a receiver against interference from transmissions out of the pass-band, or it can be used to reduce spurious output from a transmitter with up to 50 W of output power.
- The BPF 4/4-C-version fits directly into our receiver multicouplers PRO-AR4G-N... etc.
- The filter can be tuned within the entire 66 - 88 MHz band. It has very small dimensions owing to the use of helical resonators. Careful design and choice of materials ensure reliable operation over a wide temperature range.
- The housing is made of extruded aluminium, the chassis of steel, and teflon insulation has been used in the coaxial cables and in the connectors.
- The filter is black vinyl coated to prevent corrosion.

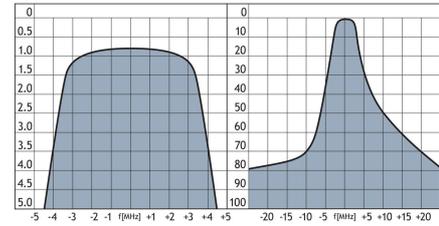

PROCOM A/S reserve the right to amend specifications without prior notice.

21/01/11



ORDERING DESIGNATIONS

TYPE NO.	PRODUCT NO.
BPF 4/4	200000883

SPECIFICATIONS

ELECTRICAL	
MODEL	BPF 4/4
FILTER TYPE	Band-pass filter
TUNING RANGE	66 - 88 MHz
MAX. INPUT POWER	50 W
INSERTION LOSS	≤ 1.2 dB (typ.)
ATTENUATION AROUND PASS-BAND	See curves
OUT OF BAND ATTENUATION	See curves
IMPEDANCE	Nom. 50 Ω
SWR	≤ 1.5
MECHANICAL	
TEMP. RANGE	-30° C → +60° C
CONNECTORS	BNC-female (others on request)
DIMENSIONS (L x W x H)	165 x 104 x 33 mm
WEIGHT	Approx 500 g

TYPICAL RESPONSE CURVES