

DPF 70/6...

6-Cavity Duplexer for the 450 MHz Band

DESCRIPTION

- The DPF 70/6... is a 6-cavity duplex filter for duplex radiotelephones.
- The DPF 70/6... can be adjusted within the complete 406 - 470 MHz band. The duplexer can be delivered in four different versions according to required duplex spacing. See also "Ordering information" below.
- The DPF 70/6... is primarily intended for equipment, where the TX and RX operate on single frequencies, but it can also, however with slightly reduced data, be used where the TX and RX operate on several channels, i.e. within a certain port bandwidth. In the last case, factory tuning is recommended.
- The filter uses full-length ¼ cavities in a compact, extruded aluminium housing. The chassis is made of passivated steel, and teflon insulation has been applied in the coaxial cables and in the connectors.
- The filter is black vinyl coated to prevent corrosion.



ORDERING DESIGNATION

TYPE	PRODUCT NO.	DUPLEX SPACING (MHZ)
DPF 70/6 - 5/7	200000385	5 - 7
DPF 70/6 - 7/9	200000400	7 - 9
DPF 70/6 - 9/13	200000407	9 - 13
DPF 70/6 - 13/16	200000417	13 - 16

SPECIFICATIONS

ELECTRICAL	
MODEL	DPF 70/6...
TX/RX FREQUENCY	406 - 470 MHz
MAX. INPUT POWER	50 W
TX NOISE SUPPRESSION	
ON RX-FREQUENCY	
Single-channel tuned:	≥ 85 dB
Multi-channel tuned, 2 MHz BW:	≥ 65 dB
INSERTION LOSS TX-ANT AND ANT-RX (at 10 MHz duplex spacing)	
Single-channel tuned:	≤ 1.2 dB (typ. 1.0 dB)
Multi-channel tuned, 2 MHz BW:	≤ 1.2 dB (typ. 1.0 dB)
RX ISOLATION	
ON TX-FREQUENCY	
Single-channel tuned:	≥ 85 dB
Multi-channel tuned, 2 MHz BW:	≥ 65 dB
IMPEDANCE	Nom. 50 Ω
SWR (All ports)	≤ 1.5
MECHANICAL	
TEMP. RANGE	-30° C → +60° C
FREQ. STABILITY	Approx. 4.5 ppm/° C
CONNECTIONS	BNC-female
DIMENSIONS (L x W x H)	226 x 154 x 33 mm
WEIGHT	Approx. 990 g


ORDERING INFORMATION

When ordering, please use the table above to select the appropriate ordering designation for the desired filter type. If duplex TX and RX frequencies are stated when ordering, the duplexers are delivered factory adjusted. If TX and RX frequencies are not stated, the filters are delivered non-adjusted.

PLEASE NOTE

Special configurations of this filter type may be quoted on request. For instance, the filter can be delivered with other connector types, or with flying leads (RG 316 coaxial cable) terminated with connectors or for soldering-connection.

TYPICAL RESPONSE CURVES @ 10 MHz SPACING

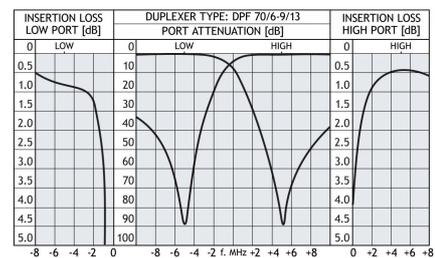

 PROCOM A/S reserve the right to amend specifications without prior notice.
04/08/14