



PRO-ISO-PHY-TETRA-ELW

Two TMO TETRA Mobile-Station and one DMO TETRA Mobile Station

- The PRO-ISO-PHY-TETRA-ELW combiner provides the possibility of connecting up to two TMO TETRA radios into one common antenna.
- ETSI compliant connection of two digital radios.

DESCRIPTION

- The PRO-ISO-PHY-TETRA-ELW supports Direct Mode Operation (DMO), giving one TETRA mobile radio the ability to communicate in direct mode.
- The PRO-ISO-PHY-TETRA-ELW is the successor to the PRO-MIX-PHY-TETRA-ELW-N-2RXI.
- The PRO-ISO-PHY-TETRA-ELW has improved isolation between the ports - more than 60 dB - and lower insertion loss.
- The use of high-quality system components such as highly selective helical duplex filters and high-performance isolators provides high isolation and secure communication.
- Built-in high-pass filter, for attenuating interference from 150 - 174 MHz and 74 - 87.5 MHz bands.
- The smallest and most compact design on the market.
- Suitable for both stationary and mobile use.
- Also available in tray for 19" rack mounting.
- Vibration and shock tested in accordance with EN-60068**.

**Tested in accordance with:

Random test: EN 60068-2-64, test specification: EN 300 019-2-5 V3.0.0.

Shock test: EN 60068-2-27, test specification: EN 300 019-2-5 V3.0.0.

Bump test: EN 60068-2-29, test specification: EN 300 019-2-5 V3.0.0.

ORDERING DESIGNATIONS

TYPE	PRODUCT NO.
PRO-ISO-PHY-TETRA-ELW-N(f)	210001983

Compatible DMO-modes

The PRO-ISO-PHY-TETRA-ELW is compatible with the following DMO modes in 406 - 410 MHz band:

- DM-MS
- DM-REP (1A)


SPECIFICATIONS

ELECTRICAL	
MODEL	PRO-ISO-PHY-TETRA-ELW
TYPE	TETRA combiner
TX/RX FREQUENCY	TX: 380 - 385 MHz RX: 390 - 395 MHz
DMO FREQUENCY *	406 - 410 MHz
INSERTION LOSS TX-ANT.	< 8.0 dB (Typ. 6.5 - 8.0 dB)




INSERTION LOSS RX-ANT.	< 8.0 dB (Typ. 6.5 - 8.0 dB)
INSERTION LOSS DMO-ANT	< 2.5 dB (Typ. 2.4 dB)
ISOLATION TRX →TRX	TX - TX: > 60 dB (380 - 385 MHz) RX - RX: > 60 dB (390 - 395 MHz) TX - RX / RX - TX: > 60 dB
ISOLATION DMO-TMO	> 60 dB
MAX. POWER	25 W / station
SWR	< 1.5
GROUP DELAY VARIATION	TX-ANT. : < 120 nsec. RX-ANT. : < 150 nsec.
MECHANICAL	
CONNECTOR TYPE	N-female
COLOUR	Black
DIMENSIONS (L x W x H)	190 (excl. conn.) x 240 x 65 mm / 7.48 (excl. conn.) x 9.45 x 2.56 in.
WEIGHT	Approx. 3700 g / 8.16 lb.
ENVIRONMENTAL	
IP-GRADE	IP-62


TYPICAL ATTENUATION VALUES

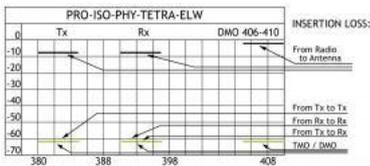

The built-in high-pass filter attenuates large signal interference and harmonic from radiosystems below 174 MHz.

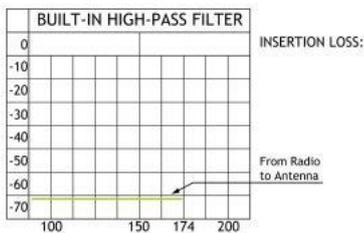

CONNECTION DIAGRAM

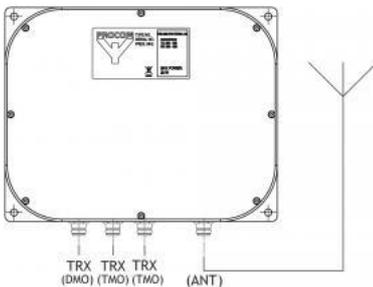



PRO-ISO-PHY-TETRA-ELW

Two TMO TETRA Mobile-Station and one DMO TETRA Mobile Station



*PROCOM A/S reserve the right to amend specifications
without prior notice.*
05/02/16